




ARTISTRY - Curve LED is an indoor LED which is ideal for curved interior design or artistic design surface with varying curvature. The design of Curve LED is innovative and fit for both 16:9 and 4:3 aspect ratio. With backside magnet system, it creates huge flexibility for it to be attached on any curved metal sheet surface. It supports front access to achieve easy maintenance and installation. It equips with independent power management supporting max. 10m distance from the display.

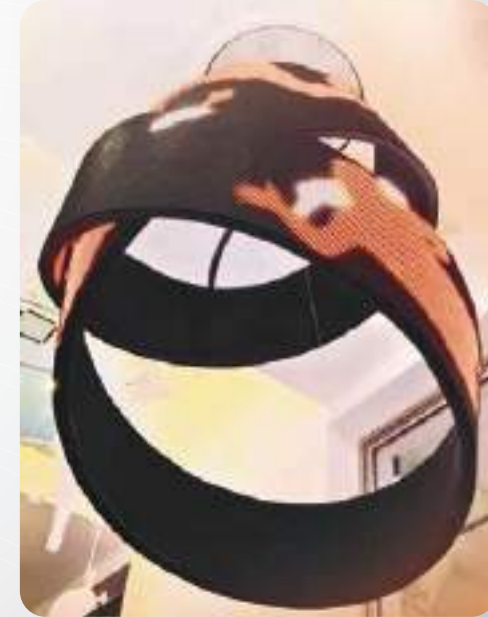


Application

- Shopping Mall
- Hotel
- Museum
- Commercial Building

· Magnetic module makes fast and easy assembly.



· Seamless and smooth nature curve, 2-5 degree curve by flat panel.



· Flexible.




· Slim.



Model	P3	P4	P6	P10
Optical Parameter				
Pixel Pitch (mm)	3mm	4mm	6mm	10mm
Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
Pixel Density (Pixel/m ²)	111111Pixel/m ²	62500Pixel/m ²	27778Pixel/m ²	10000Pixel/m ²
Viewing Angle (50% Brightness)(H/V)	140° / 140°	140° / 140°	140° / 140°	140° / 140°
Brightness (cd/m ²)	1000-1200cd/m ²	1000-1200cd/m ²	1000-1200cd/m ²	1000-1200cd/m ²
Contrast Ratio	≥1000:1	≥1000:1	≥1000:1	≥1500:1
Color Temperature (k)	3500-9300k	3500-9300k	3500-9300k	3500-9300k
Processing Depth (bit)	16bit	16bit	16bit	16bit
Refresh Rate (Hz)	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
Optimized Viewing Distance (m)	≥3m	≥4m	≥6m	≥10m
Structure Parameter				
Module Size in Pixel (W × H)	96 × 48pixel	72 × 36pixel	48 × 24pixel	32 × 16pixel
Module Size in mm (W × H × D)	288 × 144 × 7.5mm	288 × 144 × 7.5mm	288 × 144 × 7.5mm	320 × 160 × 10mm
Module Weight (kg/m ²)	8.4kg/m ²	8.4kg/m ²	8.4kg/m ²	9.4kg/m ²
IP Rating	IP43			
Operation Parameter				
Maintenance	Front			
Operating Temperature (C)	-10C~40C			
Operating Humidity (RH%)	10~90RH%			
Life Time (50% Brightness)(Hours)	≥100000Hours			
Max. Power Consumption (W/m ²)	480W/m ²	480W/m ²	480W/m ²	390W/m ²
Avg. Power Consumption (W/m ²)	160W/m ²	160W/m ²	160W/m ²	150W/m ²
System Parameter				
Video Signal Input	HDMI / DVI-D			



ARTISTRY - 弧形LED是一种室内LED，适用于弯曲的室内设计或具有不同曲率的艺术设计表面。Curve LED的设计具有创新性，适合16:9和4:3宽高比。采用背面磁体系统，可以安装于任何弯曲的金属板表面，具有巨大的灵活性。它支持前维护，实现轻松的维护和安装。它配备独立的电源管理支持显示器距离最远达10米。

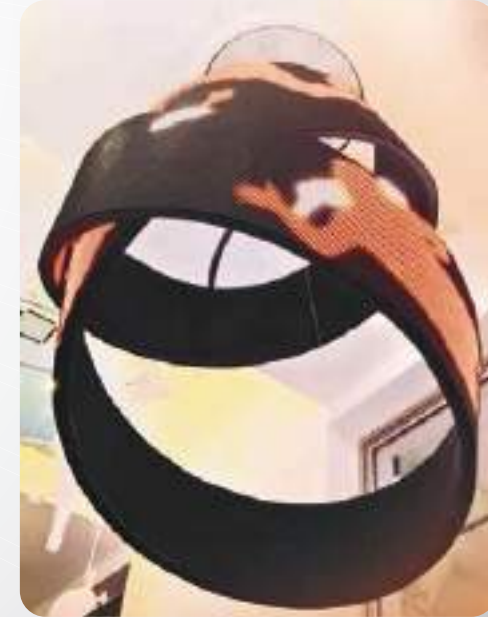


应用

- 购物商场
- 酒店
- 博物馆
- 商业建筑
- 房屋建筑

· 磁性模块使组装快速方便



· 无缝顺滑的自然曲线，呈2-5度



· 灵活的设计



· 轻薄



型号	P3	P4	P6	P10
光学参数				
点间距 (mm)	3mm	4mm	6mm	10mm
发光管类型	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
点密度 (点/m ²)	111111点/m ²	62500点/m ²	27778点/m ²	10000点/m ²
视角 (亮度为50% 时) (水平/垂直)	140° / 140°	140° / 140°	140° / 140°	140° / 140°
亮度 (cd/m ²)	1000-1200cd/m ²	1000-1200cd/m ²	1000-1200cd/m ²	1000-1200cd/m ²
对比度	≥1000:1	≥1000:1	≥1000:1	≥1500:1
色温 (k)	3500-9300k	3500-9300k	3500-9300k	3500-9300k
处理深度 (bit)	16bit	16bit	16bit	16bit
刷新率 (Hz)	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
最佳观看距离 (m)	≥3m	≥4m	≥6m	≥10m
结构参数				
模块尺寸 (W × H) (点)	96 × 48点	72 × 36点	48 × 24点	32 × 16点
模块尺寸 (W × H × D) (mm)	288 × 144 × 7.5mm	288 × 144 × 7.5mm	288 × 144 × 7.5mm	320 × 160 × 10mm
模块重量 (kg/m ²)	8.4kg/m ²	8.4kg/m ²	8.4kg/m ²	9.4kg/m ²
防护等级	IP43			
操作参数				
维护方式	前维护			
工作温度 (°C)	-10°C~40°C			
工作湿度 (RH%)	10~90RH%			
寿命 (亮度为50% 时) (小时)	≥100000小时			
最大功耗 (W/m ²)	480W/m ²	480W/m ²	480W/m ²	390W/m ²
平均功耗 (W/m ²)	160W/m ²	160W/m ²	160W/m ²	150W/m ²
系统参数				
视频信号输入	HDMI / DVI-D			